




**International
Dunnage**

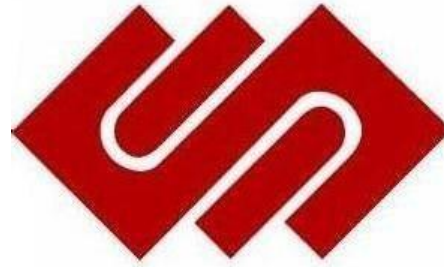

**International
Dunnage**

How to use our Dunnage Bags

International Dunnage San ve Tic A.Ş.

Head Office: Barbaros Mah. Cigdem sok. No:1 Agaoglu My Office Kat:6 No:28-29 Zip code: 34746 Bati Atasehir / Istanbul / Turkey

Tel : +90 216 593 46 00

info@internationaldunnage.com

www.internationaldunnage.com

The Basics:



Step 1:

Place the Dunnage bag between the empty gap between your cargo. Ensure that at least 70% of the surface area is covered by the Dunnage bag. If your cargo has sharp edges, use buffer material to prevent damaging the bag.

Step 2:

Make sure the bag is placed at least one inch above the floor, not extending above the top or sides of the load.

Step 3:

Begin inflating the bag until reaching the ideal working air pressure. Once this has been achieved, remove the inflator-tool from the valve.



International
Dunnage

How to Inflate/Deflate Safelock Valve:



Step 1:

Position the SafeLock Tip over the SafeLock Valve and push the plastic rim down to lock the SafeLock Tip into place. If you are reusing the bag, be sure the Valve is closed before inflating.

Step 2:

Once the Safelock Tip has snapped onto the SafeLock Valve, begin inflating until the bag has reached the desired air pressure. To remove the SafeLock Tip, pull the rim up.

Step 3:


To deflate, press and turn the Valve. The Valve remains open until turned back. The slots in the valve allow for a coin to be used to press and turn the Valve open and closed.





International
Dunnage

How to Inflate/Deflate JetFlow Valve:

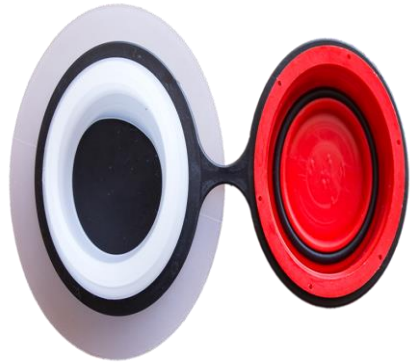

Step 1:

Push the 'Mini JetFlow air gun' directly into the middle of the JetFlow Valve. Our JetFlow Valves do not need any additional Tips/Nozzles to inflate.

Step 2:

Once the Mini JetFlow air gun is secure, start inflating. The air gun has a built in Venture system, so once the bag has reached the ideal working pressure any extra air will automatically vent from the back of the airgun. Once full, close the cap.

Step 3:

In the event you need more air pressure, simply cover the back of the air gun with you hand. To deflate the bag, push the middle black part of the JetFlow valve all the way down until it locks.





International
Dunnage

How to Inflate/Deflate Combo Valve:

Step 1:

Position the Combo Tip over the Combo Valve and push down. The Combo Tip will automatically Snap onto the Valve. If you are reusing the bag, ensure the Valve is closed first.

Step 2:

Once the Combo Tip has snapped onto the Combo Valve, begin inflating until the bag has reached the desired air pressure. To remove the Combo Tip, pull the rim up.

Step 3:

To deflate, press and turn the red stem in the middle of the Combo Valve. The Valve remains open until turned back into the closed position.





**International
Dunnage**

**Thank you for your patience and for your interest in
International Dunnage.**

International Dunnage San ve Tic A.Ş.

Head Office: Barbaros Mah. Cigdem sok. No:1 Agaoglu My Office Kat:6 No:28-29 Zip code: 34746 Bati Atasehir / Istanbul / Turkey

Tel : +90 216 593 46 00

info@internationaldunnage.com

www.internationaldunnage.com