


SafeLock Valve

- * **Simple design:** It is only made out of 4 parts; Body, Stem, Spring and O-Ring
- * **Low profile:** It is 23 mm in height, and can easily fit between very narrow voids.
- * **Fast flow:** It has large inner diameter to allow faster air flow. To reach optimum filling times, it is recommended to be used with our Safe-Lock Filling Tool.
- * **Safe & Airtight:** It's mono-block body reduces the risk of leakage. It only has one sealing point
- * **Multi purpose:** Due to it's spring loaded construction, it is AAR certified and can be used on all dunnage bags levels.
- * **Reusable:** By turning the stem at a 90 degree angle clockwise and counter clockwise, the valve can be easily closed and opened.

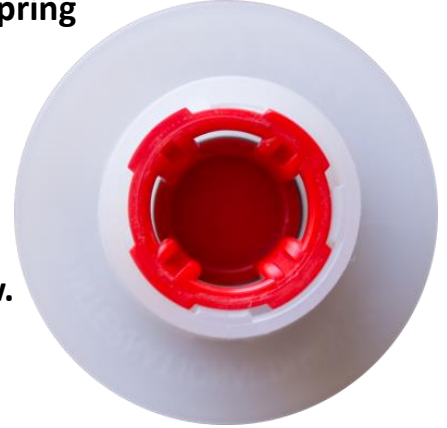

SafeLock Inflator Tip

- * **User friendly:** By pressing the rim down on the valve it automatically locks and becomes airtight.
- * **Low profile:** It is 46 mm in height and can easily fit between very narrow voids.
- * **Durable:** It is inject molded out of advanced polymers to sustain it's durability and is long lasting.